


Range: Washbasin

Ref: 39209 - Clinical sink sprayer with back flow preventer and hand-held shower 45°

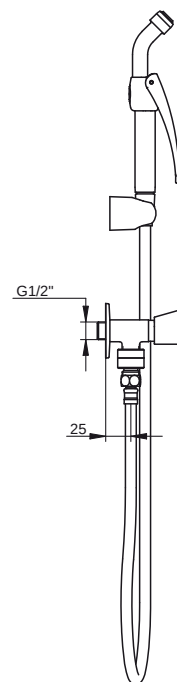

Working pressure :

- 1 to 5 bar
- Max. static operating pressure: 6 bars

Flow :

- 9 l/min at 1 bar

Flow time :

- As long as the user is pressing the trigger

Hydraulic supply :

- M G 1/2" (15x21) with a standard tap

Material and color finish :

- Plastic lever control / RAL 9010 white epoxy powder-coated brass finish
- White PVC flexible hose (EPDM stainless steel knitting for NaOCl disinfection)

Security :

- HA NF certified vacuum breaker to prevent pollution of the network from spoiled water backflow.(EN 1717)

Delivered with :

- 1 Hand-held shower 45°
- 1 Adaptor socket
- 1 Sprayer handle holder
- 1 Flexible hose : 1M
- 1 Standard tap with mural flange

Standards & approvals :

- HA NF certified vacuum breaker
- EN 200 compliant standard tap
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540 / 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227