


Range : Sink Sprayer

Ref : 39211 - Sink sprayer with P12A timed flow tap

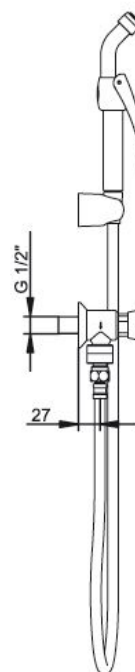

> Working pressure :

- 1 to 5 bar
- Max. static usage pressure: 6 bars

> Flow :

- 9 l/min at 1 bar

> Flow time :

- 20 seconds (± 5 seconds)

> Hydraulic supply :

- M G 1/2" (15x21) with PRESTO 12 A NF

> Material and colour finish :

- Industrial polymere command
- Brass with RAL 9010 white epoxy finish
- EPDM with stainless steel knitted white flexible hose for NaOCl disinfection

> Security :

- HA NF air breaker to prevent pollution of the the water network by backflow (EN 1717)

> Delivered with :

- 1 45° shower handle
- 1 adaptor inlet
- 1 shower handle support
- 1 M long flexible hose
- 1 wall rose
- Instruction manual

> Standards & approvals :

- SRIPS approved air breaker
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540 / 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227