
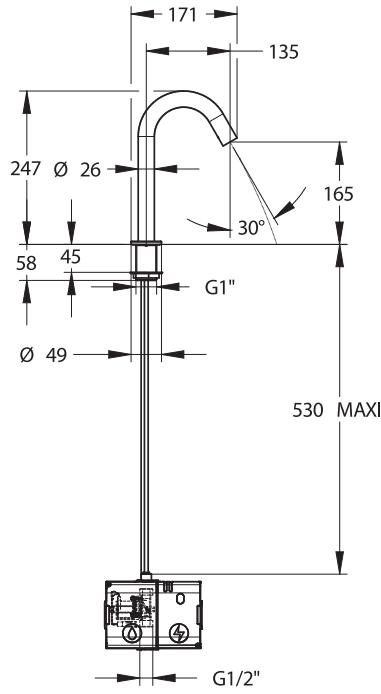


Range: PRESTO Slim

Ref: 52600 - SLIM single deck-mounted faucet, 2 L/min, battery, automatic rinsing.

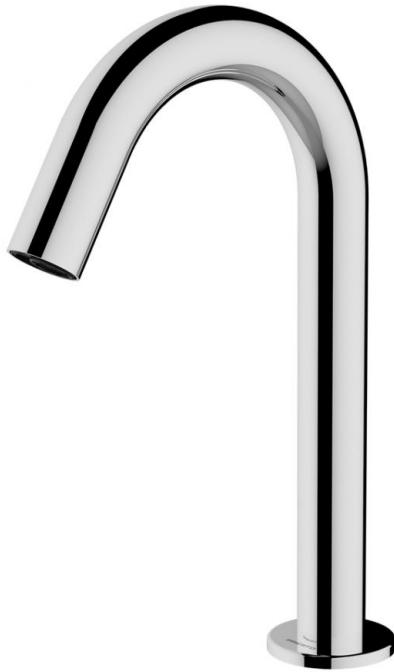

Recommended operating pressure:

- 1 to 5 bar.

Operation:

- Automatic start and stop via presence detection.
- Contactless activation suitable for persons with reduced mobility

Flow rate:

- 2l/min at 3 bar.
- Wetting zone at 2l/min estimated at 25 cm from the base of the faucet.

Hydraulic supply:

- G 1/2" (15x21) for cold and pre-mitigated water.

Power supply:

- 6xLR6 batteries (not included), to be fitted inside the solenoid valve enclosure.

Material and finish color:

- Spout and base plate made of stainless steel.
- Mounting shank made of brass.
- Chrome finish.

Thermal resistance:

- Withstands temperatures up to 65 °C for 30 minutes (thermal shock resistance).

Safety:

- Automatic solenoid valve shut-off in the event of flow exceeding 30s, power failure or detector damage.
- Automatic 30-second rinse, 48h after last use.

Delivered with:

- 1 fixing nut, 1 gasket, 1 filter gasket and 1 base plate.
- 1 control box.
- 1 solenoid valve in the control box.

Certification:

- ACS

