
TECHNICAL DATA SHEET

Range: PRESTO Slim
Ref: 52606 - SLIM wall-mounted faucet, 2 L/min, mains powered, automatic rinsing.



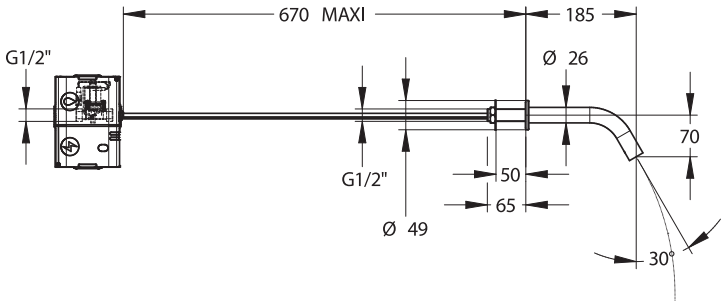

Recommended operating pressure:
- 1 to 5 bar.

Operation:
- Automatic start and stop via presence detection.
- Contactless activation suitable for persons with reduced mobility

Flow rate:
- 2l/min at 3 bar.
- Wetting zone at 2l/min estimated at 25 cm from the base of the faucet.

Hydraulic supply:
- G 1/2" (15x21) for cold and pre-mitigated water.

Power supply:
- 230V mains power supply to plug into a wall outlet.

Material and finish color:
- Spout and base plate made of stainless steel.
- Mounting shank made of brass.
- Chrome finish.

Thermal resistance:
- Withstands temperatures up to 65 °C for 30 minutes (thermal shock resistance).

Safety:
- Automatic solenoid valve shut-off in the event of flow exceeding 30s, power failure or detector damage.
- Automatic 30-second rinse, 48h after last use.

Delivered with:
- 1 fixing nut, 1 gasket, 1 filter gasket and 1 base plate.
- 1 external solenoid valve
- 1 control box.

Certification:
- ACS

INNOVATION AWARDS IDÉOBAIN SILVER WINNER

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.