


**Range:** PRESTO 5750

**Ref:** 55130 - Deck-mounted sensor mixer for washbasin with standard spout, rotating base, battery

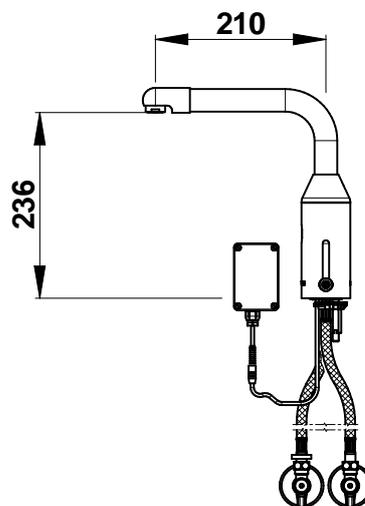

**> Working pressure :**

- 1 to 5 bar

**> Operation:**

- Starts and stops automatically by hand detection
- Sensor trigger suitable for PRM, elderly, children and disabled people

**> Flow :**

- 6l/min with regulated star-shaped flow straightener (to limit biofilm fixation)
- Anti-water-hammering design

**> Hydraulic supply :**

- F G 3/8" (12x17) hoses

**> Power supply :**

- External 6V CRP2 lithium battery in IP65 waterproof case

**> Material and colour finish :**

- Chrome-plated brass body
- Chrome-plated brass base
- Smooth spout and body without water nor bacteria retention

**> Thermal resistance :**

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

**> Security :**

- Anti-overflow security time set to 30 seconds preventing the water to flow continuously
- Periodic hygienic 30 seconds duty flush, every 72 hours after last use
- Automatic shutdown of solenoid valve in case of low battery or sensor damage

**> Delivered with :**

- 1 Brass clamping nut
- 1 Seal and washer
- 2 PEX hoses with 3/8" (12x17) female nut with integrated filters and NF check valves
- 2 Stop valves with filters for wall/bracket mounting
- 1 Self-adhesive sticker

**> Standards & approvals :**

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Resistant to salt spray 200 H (NSS test) in accordance with standard/ NF ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

