
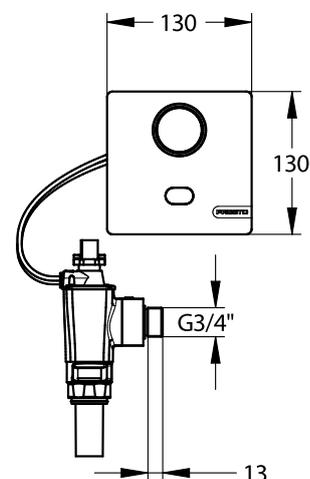


**Range:** Sensor flush valve for cross-partition control

**Ref:** 55436SB - PRESTO 7300 XL N, mains power - Suitable for rimless toilets bowls

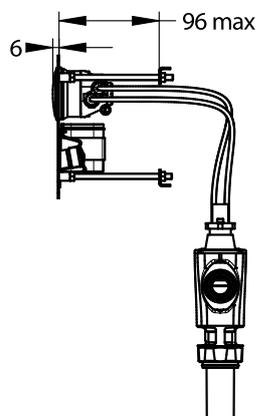

#### > Working pressure:

- 1 to 5 bar

#### > Volume of water delivered (adjustable on request through PRESTO setting tool):

- Small volume: 4l (+/- 1 L) Adjustable from 2 to 6l at 2.5 bar
- Large volume: 6l (+/- 1 L) Adjustable from 4 to 9l at 2.5 bar
- Volume preset at +/- 1,5l on pressure range from 1,2 to 4 bar
- Anti-water-hammering device
- 60l/min flow regulator

#### > Operation:

- Automatic flush by optoelectronic detection
- Manual over-ride button

#### > Hydraulic supply:

- On PRESTO 1000 XL tap with 3/4" (20x27) integrated stop valve
- Outlet connection on flush pipe Ø 28 mm

#### > Power supply:

- With mains 7V via 12V / 24V AC or DC - compatible with 230 V AC / 12 V AC transformer not included ( See Ref. 90464 / 90711/ 90610 / 90685 / 90704 / 90686).

#### > Material and colour finish:

- Bright brass body and stop valve
- Anti-vandal brushed stainless steel 304l front plate

#### > Security:

- Suitable for rimless toilets bowls of the market, only with a PVC Presto flushing valve pipe in diameter 28 (References 47850 and 47871)
- Vacuum breaker device prevents the contamination of the water network from polluted water backflow
- Patented anti-blocking "S" system to avoid the water to flow continuously
- The solenoid valve will be closed automatically in case of low battery or any damage of detector

#### > Delivered with:

- 1 integrated stop valve
- Instruction manual

#### > Standards & approvals:

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

