



Range: URINAL SENSOR TAP

Ref: 55610 - SENSAO 8500 Urinal sensor tap - Battery operated

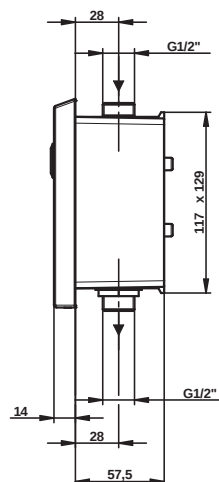

> Working pressure :

- 1 to 5 bar

> Discharge volume :

- 0.8L/Flush
- Very Good discharge volume level (2 ticks) according to WELS requirements

> Flow time :

- 6 seconds

> Operation :

- Automatic flush by optoelectronic detection
- Manual over-ride button

> Hydraulic supply :

- Built-in M G 1/2" (15x21) in-line inlet/outlet water

> Power supply :

- 6 V Lithium battery type CRP2 in a IP67 waterproof case, integrated in flush valve body

> Material and colour finish :

- Anti-vandal stainless steel grade 304L front cover with brushed finish
- Body in brass

> Security :

- The solenoid valve will be closed automatically in case of low battery or any damage of detector

> Delivered with :

- 1 flushing-mounting box
- Fixing wrench
- Wall dowel and mounting screw
- 1 integrated filter stop valve
- Instruction manual

> Standards & approvals :

- Compliant with CE directive EN61000-6-1, EN61000-6-3, DBT 73/23/CEE, 2002/95/CE
- Compliant with PUB Water Efficiency Labelling Scheme (WELS) Requirements - Appendix B

