


Range: Washbasin sensitive single tap - PRESTOGREEN RANGE

Ref: 56654 - PRESTO TOUCH® deck mounted

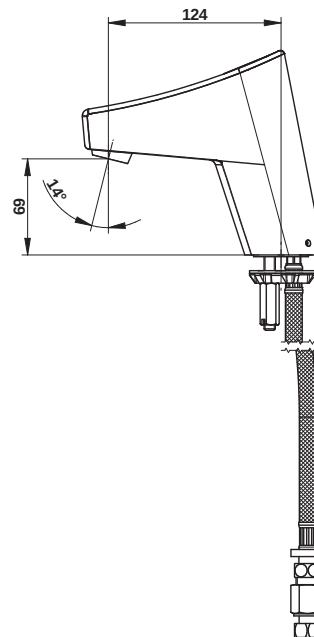

> Working pressure :

- 1 to 5 bar

> Flow :

- 1.9l/min with integrated flow limiter sprayer
- High quality anti-limescale aerator
- Anti-water-hammering design

> Flow time :

- 6 seconds (Adjustable from 1 s to 5 min) and Start/Stop function
- Adjustable duration and frequency of the "duty flush" function

> Hydraulic supply :

- G 3/8" (12x17) - cold, hot or premixed water

> Power supply :

- Integrated 6V CRP2 lithium battery

> Material and colour finish :

- Chrome-plated metal alloy components
- Injected molded metal body and cover

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Anti-blocking system preventing the water to flow continuously

> Delivered with :

- 1 PEX Hose with F 3/8" (12x17) nut and NF check valve
- 1 strainer within a brass socket
- 1 straight stop valve G 3/8" (12x17)
- 1 Fixing bracket
- 1 Flange gasket
- 1 Fastening nut
- Instruction manual

> Standards & approvals :

- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

