
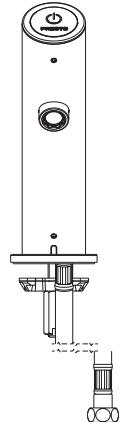


Range: PRESTO LINEA TOUCH®

Ref: 57270 - Deck-mounted single sensitive tap, battery, 3l/min, 7 sec.

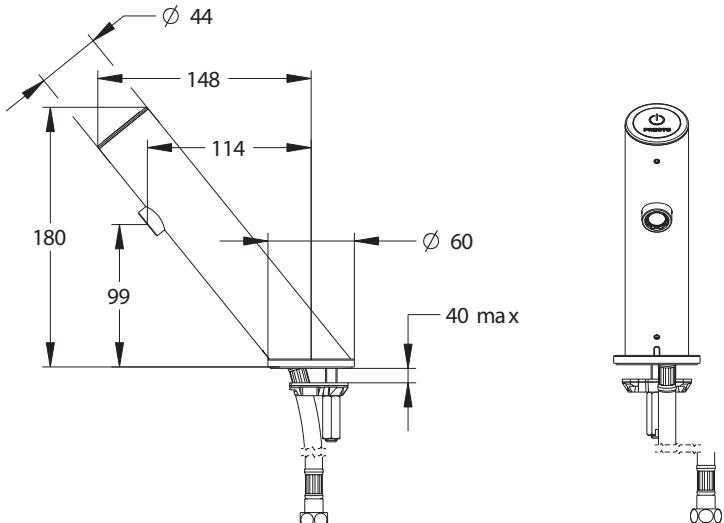

> Recommended Operating Pressure

- 1 to 5 bars

> Function

- Soft touch activation by gently pressing the TOUCH button adapted for PRM
- Automatic shut-off after preset timing
- Voluntary shut-off with start/stop function

> Flow Time

- 7 seconds default setting
- Adjustable duration from 1 second to 5 minutes via button programming without software

> Flow Rate

- 3l/min at 3 bar with integrated anti-limescale aerator

> Hydraulic Supply

- PEX Flexible F G 3/8" (12x17) for cold or premixed water

> Power Supply

- Integrated 3V CR123A lithium batteries (included)

> Material and Finish

- Brass body: Chrome finish
- Molded metal cover: Chrome finish

> Thermal Resistance

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Safety

- Smooth internal body to limit biofilm and bacterial growth
- Adjustable hygienic automatic flushing of 30 seconds every 24 hours after the last use, limiting bacterial development
- Automatic solenoid valve shutdown in case of low battery.

> Settings

- Flow time, automatic flushing duration, automatic flushing frequency, long-duration flow activation (for thermal shock)
- Via TOUCH button: <http://www.prestodatashare.com/documentation/pdfs/touch.pdf>

> Delivered with

- 1 fixing nut, 1 gasket, and 1 washer
- 1 PEX flexible hose with swivel nut, non-return valve NF, and basket filter
- 1 signalling sticker
- 1 installation manual

> Standards / Approvals

- Lead-free brass in accordance with NF EN1982, EN12164, NF EN12165
- Dezinification compliant with ISO 6509 and NDZ
- 200-hour neutral salt spray resistant (NSS) in accordance with NF ISO 9227

