


**Range:** PRESTO LINEA TOUCH®

**Ref:** 57284 - Deck-mounted sensitive mixer tap, mains 230V with transformer ,1,9 l/min, 7 sec

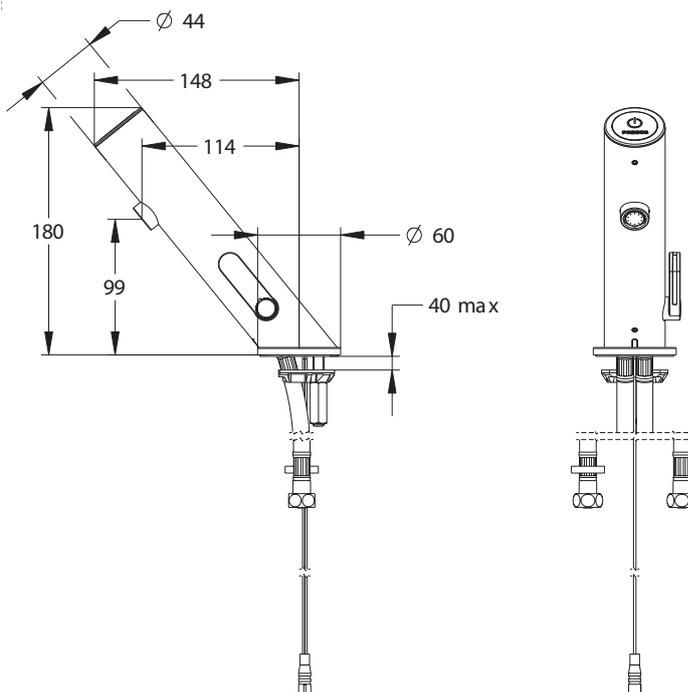

#### > Recommended Operating Pressure

- 1 to 5 bars

#### > Function

- Effortless manual activation by the TOUCH button recommended for PRM
- Self closing mechanism at the end of the pre-set flow time.
- Manual stop with start/stop function

#### > Flow time

- seconds set by default
- Adjustable flow time from 1 second to 5 minutes through button programming without software

#### > Flow rate

- 1,9 l/min at 3 bar with integrated regulated anti-limescale aerator

#### > Hydraulic Supply

- PEX F G 3/8" (12x17) flexible for cold or premixed water

#### > Power Supply

- Mains 230 V AC / 7 V DC with transformer

#### > Materials & Finish

- External brass body, Chrome Finish
- Molded metal cover: Chrome Finish

#### > Thermal Resistance

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security

- Smooth inner body for limiting biofilm binding and bacterial development
- Adjustable hygienic automatic flushing of 30 seconds every 24 hours after the last use, limiting bacterial development
- Automatic solenoid valve shutdown in case of low battery.

#### > Settings

- Flow time, automatic flushing duration, automatic flushing frequency, long-duration flow activation (for thermal shock)
- Via TOUCH button: <http://www.prestodatashare.com/documentation/pdfs/touch.pdf>

#### > Delivered with

- 1 fixing nut, 1 gasket, and 1 washer
- 1 PEX flexible hose with swivel nut, non-return valve NF, and basket filter
- 1 Self-adhesive sticker
- 1 Instruction manual

#### > Standards / Approvals

- Lead-free brass in accordance with NF EN1982, EN12164, NF EN12165
- Dezincification compliant with ISO 6509 and NDZ
- 200-hour neutral salt spray resistant (NSS) in accordance with NF ISO 9227

