
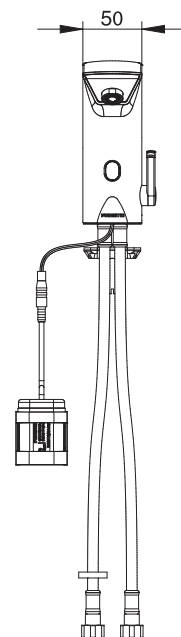


Range: PRESTO Optima

Ref: 58000 - OPTIMA deck-mounted sensor mixer tap, 3 l/min, battery

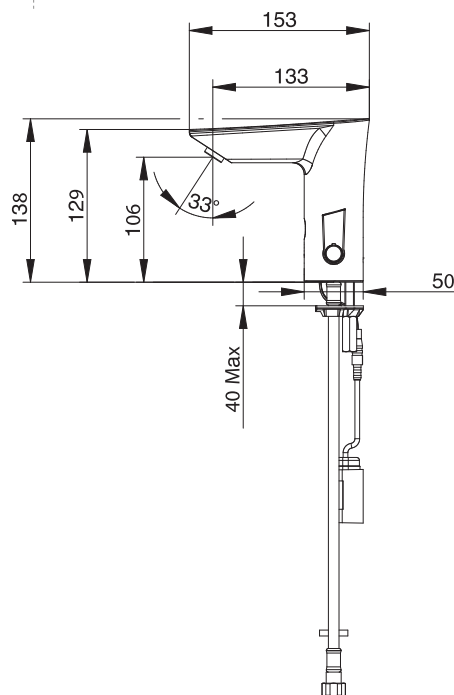

Recommended operating pressure:

- 1 to 5 bar

Operation:

- Automatic release and shut-off by hand detection
- PMR-friendly non-contact release

Flow rate:

- 3l/min at 3 bar with integrated antiscalant regulated aerator

Hydraulic power supply:

- Flexibles F G 3/8" (12x17)

Power supply:

- 6V type CRP2 lithium battery in housing integrated into valve body

Material(s) and finish(s):

- Die-cast metal body | Chrome finish

Heat resistance :

- Withstands temperatures up to 75°C for 30 minutes in thermal shock conditions

Safety:

- Automatic solenoid valve shutdown in case of flow > 30s
- Maximum temperature limitation by adjustable stop
- Automatic solenoid valve shutdown in case of battery wear or detector degradation
- Low battery warning (flashing led)

Delivered with:

- 2 Fixing nuts
- 1 Gasket and 1 washer
- 2 PEX hoses with 3/8" (12x17) female nut and NF check valves
- 2 Filter gaskets