
# **TECHNICAL DATA SHEET**

**PRESTO**®

Range: Washbasin single self-closing tap

Ref: 64764 - PRESTO NEO DUO S® wall-mounted - Dual timed-flow



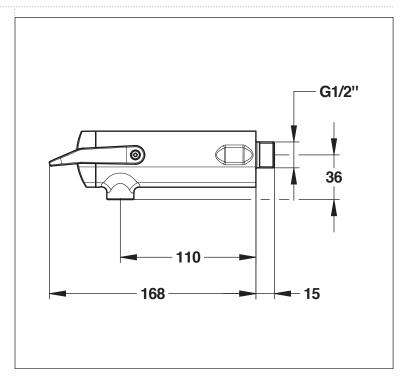

#### > Working pressure:

• 1 to 5 bar

## > Flow:

- 3 l/min at 3 bars 4-position setting
- Anti water-hammer system

#### > Flow time:

- 7 seconds lever upwards11 seconds lever downwards

#### > Hydraulic supply:

• G 1/2" x 15

### > Thermal resistance:

• This tap can withstand a thermal shock of 75°C for 30 minutes as part of a thermal shock programme

• With S® antiblocking system to prevent blocking in continuous flow

#### > Convenience:

- Soft-touch
  Two-coloured ergonomic lever, in glass fiber reinforced polymer

### > Delivered with:

- 1 Filter gasket1 coloured sticker

# > Standards / Approvals:

- Chrome-plated brass body compliant with standards NF EN1982 / NF EN12164 / NF EN12165
  Nickel-Chrome surface treatment compliant with NF EN12540
  Neutral Salt Spray (NSS) resistant: 200 h according to NF ISO 9227

















