


Range: Neo Duo

Ref: 68148 - NEO DUO deck-mounted mixer tap 3l/min 7/11sec with blue lever

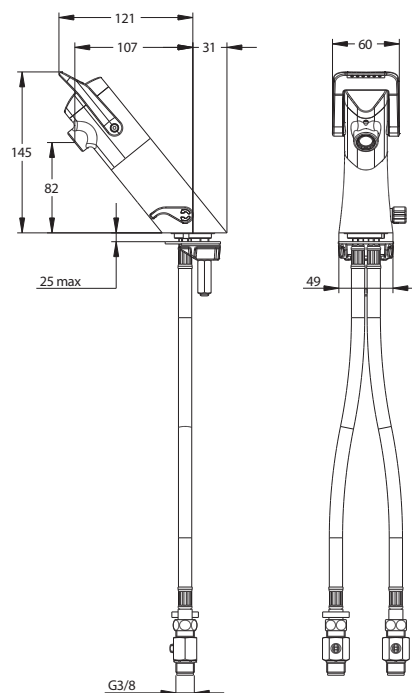

Recommended operating pressure:

- 1 to 5 bar

Flow rate:

- 3 l/min at 3 bar with integrated anti-tartar regulated aerator - 4-position setting
- Anti-waterhammer device

Flow duration:

- Short time delay: 7 sec (± 3 sec) - lever up (wetting)
- Long time delay: 11 seconds (± 3 seconds) - joystick down (rinse)
- Timers modifiable on the 2 positions with 7, 11 or 15 sec (± 5 seconds)

Hydraulic supply:

- Hoses G 3/8" (12x17)

Material(s) and finish(s):

- Brass body and cover | Chrome finish
- Ergonomic handle in technical polymer | Turquoise blue finish (RAL 5018)

Heat resistance :

- This faucet withstands a temperature of 75°C for 30 minutes under thermal shock conditions

Safety:

- Maximum temperature limitation by stop (at 38°C for cold water at 15°C/3 bar and hot water at 60°C/3 bar)

Delivered with:

- 2 PEX hoses with NF check valve and swivel nut
- 2 MM G 3/8" (12x17)
- 2 filter seals
- 1 base gasket
- 1 mounting flange

Standards / Approvals:

- Chrome-plated brass body conforming to NF EN1982 / NF EN12164 / NF EN12165
- Nickel-Chromium surface treatment to NF EN12540
- Neutral salt spray resistance (NSS): 200 h to NF ISO 9227