


Range: Sanifirst - Healthcare taps

Ref: 74014 - Kit - Electronic box + electronic faucet 75209 with mains connection

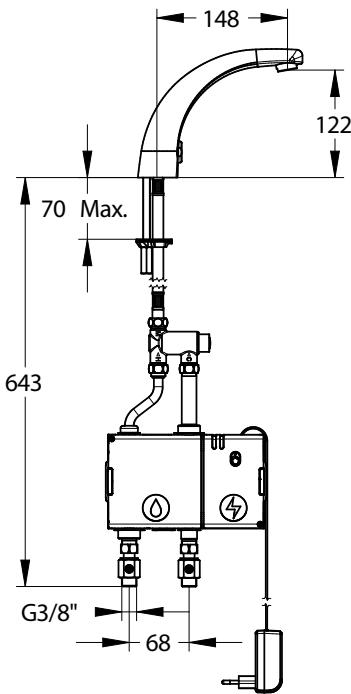

> Benefits of the product

- Aesthetic, secure casing to reduce the risk of CW/DW intercommunication, and therefore the development of bacteria.
- MASTERMIX™ function: Innovative combination of 2 solenoid valves and a thermostatic regulator: safe and reliable. No pressurised mixing chamber upstream of the obturator (NF Medical standard requirement).
- No non-return valve.
- Easy maintenance: housing with integrated 1/4-turn shut-off valves and thermostatic regulator accessible to the technician.
- Temperature maintenance and anti-scald safety
- Secure thermal shock: accessible only by technical services, by pressing and holding the button on the front of the box and switching on the thermostatic controller to full heat.
- Supplied with a fixed electronic faucet, projection 200, reference 75209

> Thermostatic regulator

- Recommended operating pressure: 1 to 5 bar. Permissible pressure difference between inlets: 2:1
- Flow rate: regulated at 6 l/min
- Hydraulic characteristics: M3/8" hot water inlet - M3/8" cold water inlet - M3/8" mixed water outlet
- Temperature preset at 38°C, adjustable by the installer from full hot to full cold
- Recommended temperature setting range: 34 to 45°C
- Hot water supply temperature: 55 to 65°C
- Cold Water supply temperature: 5°C to 25°C
- Minimum differential temperature: 15°C (between hot water inlet and mixed outlet)
- Thermal disinfection settings: up to 80°C
- Anti-scald: instant shut-off of hot water in the event of cold water cut-off
- Supplied with filters

> Box supplied with :

- 1 thermostatic mixing valve
- 2 silicone membrane solenoid valves
- 1 pair of G 3/8" shut-off taps
- 1 wall-mounted transformer

> Warranty

- 3 years on the thermostatic controller
- 1 year against manufacturing defects on all other components