



## TECHNICAL DATASHEET

### HEALTHCARE TAPWARE

#### Hospital washbasin mixer, fixed spout and drain - 75049




#### Benefits of the product

- Solid easy maintenance handle
- Multifunctional cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Flow between 4 and 6L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min.
- Water savings, safe operation and controlled water consumption.
- Star shaped flow straightener: limits the water spray, no water retention.

#### Description

Single hole washbasin mixer with brass handwash basin drain, deck-mount with solid handle. Fixed tall cast spout L 110mm. Height to nozzle 82mm. Multifunction ceramic cartridge  $\varnothing$  40: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 4 and 6L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min. Tapware fitted as standard star-shaped flow straightener. Body, spout and controls in polished chrome plated brass. SPEX stainless steel braided hoses, M10x1 LN G'3 / 8 L 350mm Reinforced fixation by a stainless steel rod. Basket filter seals mounted on the hoses limiting fouling. 10 year warranty. Sanifirst brand single hole washbasin mixer, tall fixed cast spout REF: 75049 or approved equivalent.

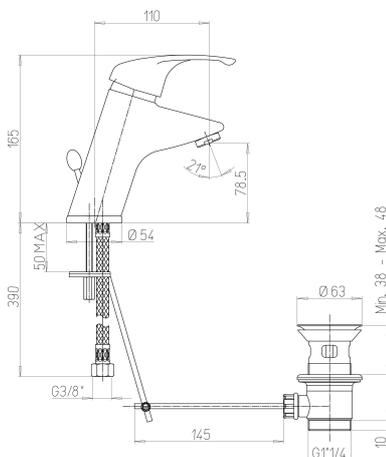



## TECHNICAL DATASHEET

### Additional Information

|                              |  |
|------------------------------|--|
| <b>Product reference</b>     | 75049  |
| <b>Previous reference</b>    | FL2400MA   |
| <b>Brand</b>                 | Sanifirst  |
| <b>Warranty</b>              | 10 years against manufacturing defects   |
| <b>Special feature 1</b>     | Fixed spout  |
| <b>Height to nozzle (mm)</b> | 78   |
| <b>Projection (mm)</b>       | 110  |
| <b>Clip-on spout</b>         | No   |
| <b>Drainage</b>              | Brass drainage   |
| <b>Flow straightener</b>     | Star shaped flow straightener, M24 x 1   |
| <b>Lever</b>                 | Solid easy maintenance handle  |
| <b>Connection</b>            | SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8 with basket filter seals and flow rate limiters     |
| <b>Flow rate</b>             | Flow between 4 and 6L / min at 3 bar - in accordance with the French norm standard "Medical" |
| <b>Minimum pressure</b>      | 1 bar  |
| <b>Recommended pressure</b>  | 3 bar  |
| <b>Maximum pressure</b>      | 5 bar  |
| <b>Cartridge</b>             | 75312 Ø 40mm, dual flow, flow limiter and temperature limiter                                |