



TECHNICAL DATASHEET


HEALTHCARE TAPWARE

Hospital mixer, fixed or adjustable spout, removable - Modul'Mix - 75146



Benefits of the product

- Modul'Mix range: modularity of parts and adaptability to needs
- Retrofitable and customizable
- Elbow control lever: avoiding manual contact
- Comfortable height to spout and projection for washbasin
- Multifunctional pressure balancing cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Pressure Balancing ceramic cartridge: "basic plus" anti-scalding safety via temperature limiter ring. **Strong restriction of the DHW flow rate in the event of a DCW cut-off, and vice versa**
- Flow between 10 and 15L / min at 3 bar. Included check valves.
- Fixed or adjustable spout (optional), removable with smooth interior: facilitates cleaning and disinfection, limits the deposit of the biofilm.
- Star-shaped flow straighteners: limits the water spray, no water retention.
- Simple and fast maintenance

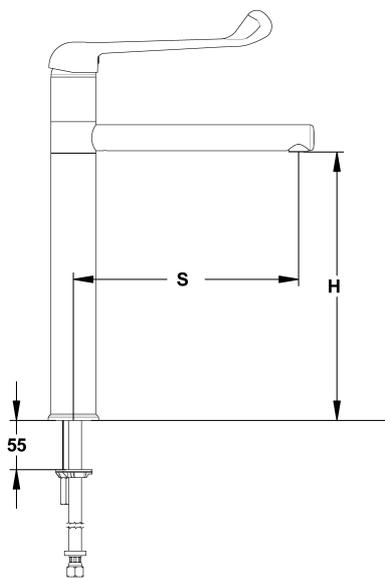

Description

Single hole hospital mixer (Modul'mix design), no drain, for hand wash basin, with 220mm long medical handle avoiding manual contact, using elbow, forearm or wrist. Fixed or swivel spout, smooth and removable for disinfecting L 250mm. Height to nozzle 300mm. Height and length of spout adapted without changing the entire tapware. Ceramic cartridge \varnothing 40, pressure balancing: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 10 and 15L / min at 3 bar. Integrated check valves. Tapware with star-shaped flow straightener eliminating water retention and impurities; withstands thermal and chlorine shocks Smooth body, spout and controls in polished chrome plated brass. SPEX stainless steel braided hoses, M10x1 LN G'3 / 8 L 650 mm Reinforced fixation by a stainless steel rod. 10 year warranty. Sanifirst brand hospital mixer, single hole and pressure balancing, fixed or swivel smooth spout, removable, for hand wash basin REF: 75146 or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	75146
Previous reference	FL6032MC EP
Brand	Sanifirst
Warranty	10 years against any manufacturing defect
Special feature 1	Fixed spout
Special feature 2	Swivel spout
Special feature 3	Removable spout
Height to nozzle (mm)	300
Projection (mm)	250
Length of lever (mm)	220
Clip-on spout	No
Flow straightener	Star shaped flow straightener, M24 x 1
Connection	SPEX hoses 650 mm - M10 X 1 - LN G'3 / 8 with basket filter seals
Minimum pressure	1 bar
Recommended pressure	3 bar with a pressure differential less than 1 bar
Maximum pressure	5 bar
Max tightening	40
Cartridge	75313 Ø 40mm, double flow, temperature limiter, pressure balancing
Coating	Nickel > 10 microns - Chrome > 0.3 microns