



### HEALTHCARE TAPWARE

#### Hospital spout, wall mount, swivel, removable upward - 75221




#### Benefits of the product

- Remote control: greater freedom of installation.
- Smooth interior removable swivel spout: easy cleaning and disinfection, limits the formation of biofilm.
- Suitable for installation of a terminal filter.
- Star shaped flow straightener: Limits the water spray, no water retention.
- Chlorine and thermal shock resistant.

#### Description

Monofluid hospital wall-mount gooseneck spout, for use with remote control (foot, femoral type or remote control mixer). Smooth tube spout, swivel, removable, L 200 mm. Height to nozzle 170mm, suitable for end filtration. Tapware with star-shaped flow straightener reducing scaling, eliminating water retention and impurities; withstands thermal and chlorine shocks Smooth body and polished chrome-plated brass spout. M1/2 connection 10 year warranty. Chlorine and thermal shock resistant. Sanifirst brand hospital upward gooseneck spout, swivel and removable smooth tube REF: 75221 or approved equivalent.

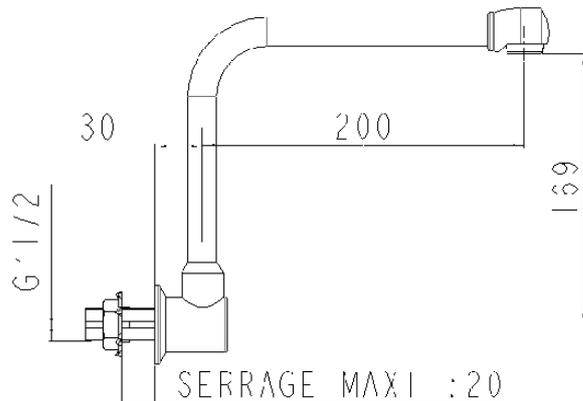



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75221
<b>Previous reference</b>	FL9401MA
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defects
<b>Special feature 1</b>	Swivel spout
<b>Special feature 2</b>	Removable spout
<b>Special feature 3</b>	Wall-mounted
<b>Height to nozzle (mm)</b>	170
<b>Length of spout (mm)</b>	200
<b>Projection (mm)</b>	230
<b>Clip-on spout</b>	No
<b>Flow straightener</b>	Star shaped flow straightener, M24 x 1
<b>Connection</b>	M G'1/2
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Length of threaded rod (mm)</b>	56
<b>Max tightening</b>	20
<b>Coating</b>	Nickel> 10 microns - Chrome> 0.3 microns