




### HEALTHCARE TAPWARE

#### Shower mixer with long openwork lever - 75600

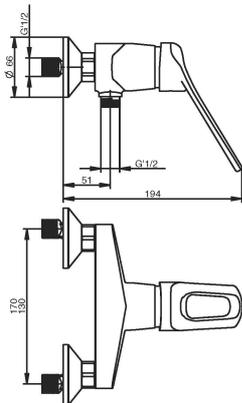

#### Benefits of the product

- Ergonomic lever: suitable for patients and staff
- Multifunctional cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Flow between 9 and 12L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 9 and 20L / min.
- Water savings, safe operation and controlled water consumption.

#### Description

Shower mixer, 150mm span, no drain, wall-mount with long openwork handle. Multifunction ceramic cartridge  $\varnothing$  40: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 9 and 12L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 9 and 20L / min. Body and control in polished chrome plated brass. Shower outlet M G'1 / 2 with integrated back-flow valve. Connection LN G'3 / 4 comes with rosettes and off-centre fittings M G'1/2 10 year warranty. Sanifirst brand shower mixer, 150mm span REF: 75600 or approved equivalent.



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75600
<b>Previous reference</b>	NC
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defects
<b>Special feature 1</b>	Shower
<b>Special feature 2</b>	Wall-mounted
<b>Clip-on spout</b>	No
<b>Lever</b>	Openwork lever
<b>Connection</b>	Supplied with rosettes and eccentric fittings M G 1/2 "
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Cartridge</b>	75312 Ø 40mm, dual flow, flow limiter and temperature limiter
<b>Coating</b>	Nickel > 10 microns - Chrome > 0.3 microns