




### HEALTHCARE TAPWARE

#### Hospital washbasin mixer with fixed spout no drain - 75609

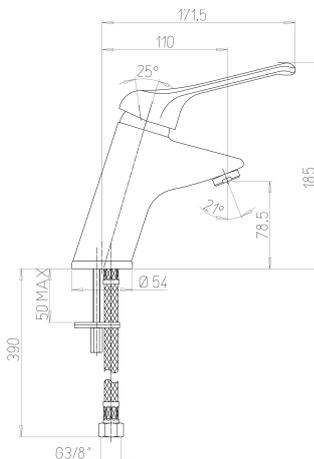

#### Benefits of the product

- Ergonomic: easy grip
- Multifunctional cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Flow between 4 and 6L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min.
- Water savings, safe operation and controlled water consumption.
- Star shaped flow straightener: limits the water spray, no water retention.

#### Description

Single hole washbasin mixer without drain for handwash basin, deck-mount with openwork handle. Fixed tall cast spout L 110mm. Height to nozzle 78.5mm. Multifunction ceramic cartridge Ø 40: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 4 and 6L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min. Tapware fitted as standard star-shaped flow straightener. Body, spout and controls in polished chrome plated brass. SPEX stainless steel braided hoses, M10x1 LN G'3 / 8 L450mm. Basket filter seals mounted on the hoses limiting fouling. Reinforced fixation by a stainless steel rod. 10 year warranty. Sanifirst brand single hole washbasin mixer, tall fixed cast spout REF: 75609 or approved equivalent.



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75609
<b>Previous reference</b>	NC
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defects
<b>Special feature 1</b>	Fixed spout
<b>Height to nozzle (mm)</b>	78
<b>Projection (mm)</b>	110
<b>Clip-on spout</b>	No
<b>Drainage</b>	Without drainage
<b>Flow straightener</b>	Star shaped flow straightener, M24 x 1
<b>Lever</b>	Openwork facilitates grip
<b>Connection</b>	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8 with basket filter seals and flow rate limiters
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Cartridge</b>	75312 Ø 40mm, dual flow, flow limiter and temperature limiter
<b>Coating</b>	Nickel > 10 microns - Chrome > 0.3 microns