


Range: Santé Standard

Ref: 75611 - MIXER WITH FIXED SPOUT WITH POP UP

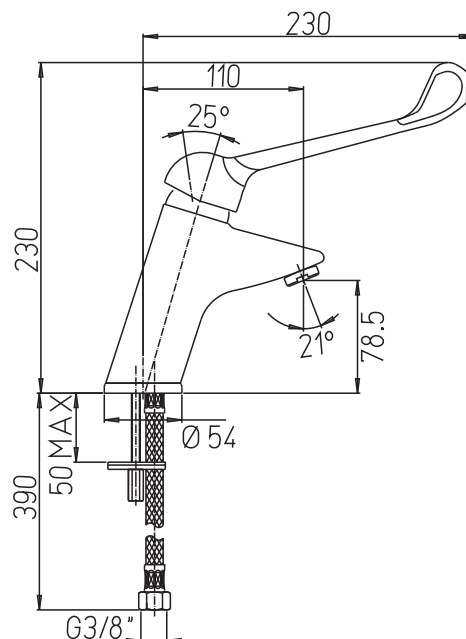

Benefits of the product

- Ergonomic: easy to use elbow handle (for patients and technical staff)
- Hand hygiene: avoiding manual contact
- Ceramic cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Flow between 4 and 6 L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20 L / min.
- Water savings, safe operation and controlled water consumption.
- Star shaped flow straightener: limits the water spray, no water retention.

Benefits of the product

- Elbow control
- Ceramic cartridge: temperature limiter with 7 settings, double flow rates, and maximum flow rate adjustment
- Flow rate between 4 and 6 L/min at 3 bar – in accordance with the NF "Medical Environment" French standard; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20 L / min.
- Water savings, safe use, and controlled water consumption.
- Star-shaped jet-breaker: limits water spray, no water retention

Model

- Single-hole deck-mounted sink mixer without drain
- Star-shaped aerator M24 x 1
- Ceramic cartridge Ø 40: temperature limiter with 7 adjustment positions, dual flow rates, and maximum flow rate adjustment.
- Faucet comes factory-equipped with a star-shaped jet-breaker.

Flow Rate

- Flow rate between 4 and 6 L/min at 3 bar – in accordance with the NF "Medical Environment" French standard
- Flow rate can be adjusted—if the limiters are removed—using an adjustment screw to set the flow between 4 and 20 L/min

Dimensions

- Fixed high cast spout, length 110 mm.
- Height under spout: 78.5 mm.

Materials

- Body, spout, and control mechanism made of polished chrome-plated brass.

Connections

- Hoses with M10x1 stainless steel braided SPEX sheath, G3/8 captive nut, length 450 mm.
- Mounting reinforced with an M8 rod.

Warranty

- 10-year warranty against any manufacturing defects.