




## TECHNICAL DATASHEET

### HEALTHCARE TAPWARE

#### Hospital sink mixer, tall spout, swivel - 75620

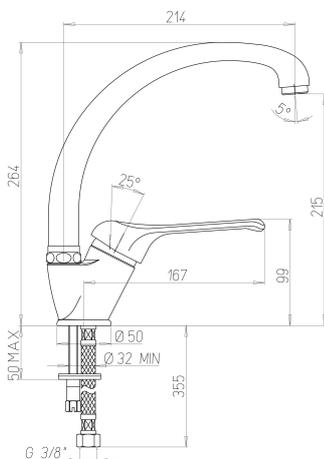

#### Benefits of the product

- Usability: Easy grip of the openwork handle
- Increased height to spout and projection for easy washing
- Multifunctional cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Flow between 4 and 6L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min.
- Water savings, safe operation and controlled water consumption.

#### Description

Single hole sink mixer without drain for hand wash basin, deck-mount with openwork handle. Swivel tall cast spout L 177mm. Height to nozzle 225mm. Multifunction ceramic cartridge Ø 40: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 4 and 6L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min. Tapware fitted as standard star-shaped flow straightener. Body, spout and controls in polished chrome plated brass. SPEX Hoses, M12x1 LN G'3 / 8 L 350mm. Basket filter seals mounted on the hoses limiting fouling. Reinforced fixation by a stainless steel rod. 10 year warranty. Sanifirst brand single hole sink mixer, swivel, cast spout REF: 75620 or approved equivalent.



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75620
<b>Previous reference</b>	NC
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defects
<b>Special feature 1</b>	Swivel spout
<b>Height to nozzle (mm)</b>	215
<b>Projection (mm)</b>	214
<b>Height of lever (mm)</b>	99
<b>Clip-on spout</b>	No
<b>Flow straightener</b>	Star shaped flow straightener, F22 x 1
<b>Lever</b>	Openwork facilitates grip
<b>Connection</b>	SPEX hoses 350 mm - M12 X 1 - LN G'3 / 8 with basket filter seals and flow rate limiters
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Cartridge</b>	75316 Ø 40mm, dual flow, flow limiter and temperature limiter