




HEALTHCARE TAPWARE

Fixed spout washbasin mixer tap without drainage - 75715



Benefits of the product

- Modul'Mix range: modularity of parts and adaptability to needs
- Retrofittable and customizable
- Full handle: facilitates cleaning
- Comfortable height to spout and projection for washbasin
- Multifunctional pressure balancing cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Pressure Balancing ceramic cartridge: "basic plus" anti-scalding safety via temperature limiter ring. **Strong restriction of the DHW flow rate in the event of a DCW cut-off, and vice versa**
- Flow between 10 and 15L / min at 3 bar. Included check valves.
- Fixed or adjustable spout (optional), removable with smooth interior: facilitates cleaning and disinfection, limits the deposit of the biofilm.
- Star-shaped flow straighteners: limits the water spray, no water retention.
- Simple and fast maintenance

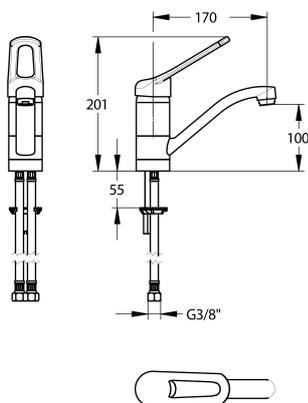

Description

Single-hole deck-mounted hand-basin mixer tap, MODULMIX design, without drainage for hand-basins, with open-work control. Smooth directional or fixed spout, Len 170mm. Spout height 100mm. Ø 40 pressure balancing ceramic cartridge: temperature limiter, dual flow (hard point at 50% opening). Flow between 10 and 15L / min at 3 bar. Integrated check valves. Tapware fitted with star shaped flow straightener as standard. Smooth body, spout and control component in polished chrome-plated brass. Hoses with SPEX sheath braided stainless steel M10X1, EP G'3/8, Len 350mm. Fixture strengthened using a stainless steel rod. 10 year guarantee. Sanifirst brand type single hole washbasin mixer tap with cast orientable or fixed spout smooth tube REF: 75715 or approved equivalent



TECHNICAL DATASHEET

Additional Information

Product reference	75715
Previous reference	FL2307MA
Brand	Sanifirst
Warranty	10 years against manufacturing defects
Special feature 1	Swivel spout
Special feature 2	Fixed spout
Height to nozzle (mm)	100
Projection (mm)	170
Clip-on spout	No
Drainage	Without drainage
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Openwork facilitates grip
Connection	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8 with basket filter seals
Minimum pressure	1 bar
Recommended pressure	3 bar with a pressure differential less than 1 bar
Maximum pressure	5 bar
Max tightening	40
Cartridge	75312 Ø 40mm, dual flow, flow limiter and temperature limiter
Coating	Nickel > 10 microns - Chrome > 0.3 microns