



TECHNICAL DATASHEET

HEALTHCARE TAPWARE

Fixed or adjustable spout hospital mixer tap with pressure balancing cartridge - Modul'Mix - 75718




Benefits of the product

- Modul'Mix range: modularity of parts and adaptability to needs
- Retrofittable and customizable
- Elbow control lever: avoiding manual contact
- Comfortable height to spout and projection for washbasin
- Multifunctional pressure balancing cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Pressure Balancing ceramic cartridge: "basic plus" anti-scalding safety via temperature limiter ring. **Strong restriction of the DHW flow rate in the event of a DCW cut-off, and vice versa**
- Flow between 10 and 15L / min at 3 bar. Included check valves.
- Fixed or adjustable spout (optional), removable with smooth interior: facilitates cleaning and disinfection, limits the deposit of the biofilm.
- Star-shaped flow straighteners: limits the water spray, no water retention.
- Simple and fast maintenance

Description

Single hole hospital mixer tap (modul'mix design) without drainage for handbasin, with long medical control Len 170mm to avoid hand contact, operated by elbow, forearm or wrist. Fixed or directional, smooth and removable for disinfection Len 200mm. Spout height 100mm. The spout height and length can be adapted without changing the complete tap. Ø 40 ceramic pressure balancing cartridge: temperature limiting stopper with 7 setting positions, dual flow (hard point at 50% opening). Flow between 10 and 15L / min at 3 bar. Integrated check valves. Standard star-shaped tap-nozzle which limits the risk of limescale, eliminates water retention and impurities and is resistant to chlorine and thermal shock treatments. Smooth body, spout and control component in polished chrome-plated brass. Hoses with SPEX sheath braided stainless steel M10X1, EP G'3/8, Len 500mm. Fixture strengthened using a stainless steel rod. 10 year guarantee. Resistant to chlorine and thermal shock treatments. Sanifirst brand type single hole pressure balancing hospital mixer tap with removable fixed or directional smooth spout for handbasins REF: 75718 or approved equivalent.

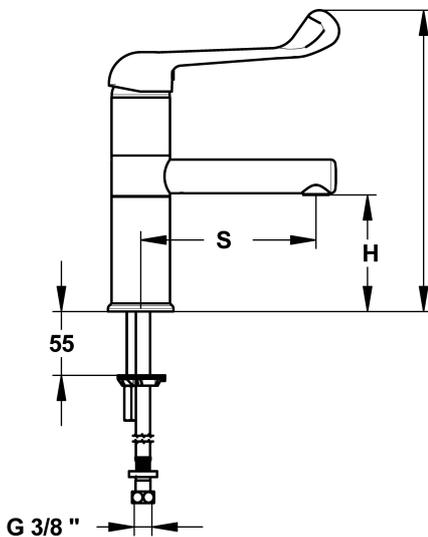



TECHNICAL DATASHEET

Additional Information

Product reference	75718
Previous reference	NC
Brand	Sanifirst
Warranty	10 years against any manufacturing defect
Special feature 1	Fixed spout
Special feature 2	Swivel spout
Special feature 3	Removable spout
Height to nozzle (mm)	100
Projection (mm)	200
Length of lever (mm)	170
Clip-on spout	No
Flow straightener	Star shaped flow straightener, M24 x 1
Connection	SPEX hoses 500 mm - M10 X 1 - LN G'3 / 8 with basket filter seals
Minimum pressure	1 bar
Recommended pressure	3 bar with a pressure differential less than 1 bar
Maximum pressure	5 bar
Max tightening	40
Cartridge	75313 Ø 40mm, double flow, temperature limiter, pressure balancing
Coating	Nickel > 10 microns - Chrome > 0.3 microns