




TECHNICAL DATASHEET

HEALTHCARE TAPWARE

Hospital sink mixer tap with fixed or directional spout - 75721

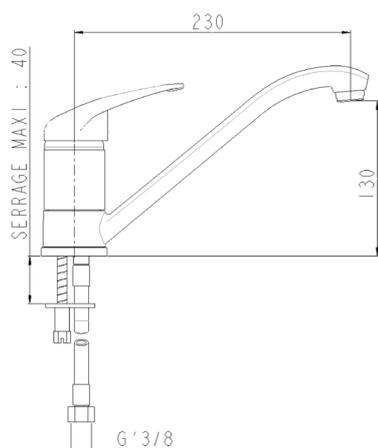

Benefits of the product

- Modul'Mix range: modularity of parts and adaptability to needs
- Retrofitable and customizable
- Openwork lever: easy prehension
- Comfortable height to spout and projection for washbasin
- Multifunctional pressure balancing cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Pressure Balancing ceramic cartridge: "basic plus" anti-scalding safety via temperature limiter ring. **Strong restriction of the DHW flow rate in the event of a DCW cut-off, and vice versa**
- Flow between 10 and 15L / min at 3 bar. Included check valves.
- Fixed or adjustable spout (optional), removable with smooth interior: facilitates cleaning and disinfection, limits the deposit of the biofilm.
- Star-shaped flow straighteners: limits the water spray, no water retention.
- Simple and fast maintenance

Description

Single-hole deck-mounted sink mixer tap, MODULMIX design, without drainage for hand-basins, with open-work control. Smooth directional or fixed spout, Len 230mm. Spout height 160mm. Ø 40 pressure balancing multi-function ceramic cartridge: temperature limiter, dual flow (hard point at 50% opening). Flow between 10 and 15L / min at 3 ba. Integrated check valves. Tapware fitted with star shaped flow straightener as standard. Body, spout and control component in polished chrome-plated brass. SPEX hoses M10X1, EP G 3/8", Len 350mm. Fixture strengthened using a stainless steel rod. 10 year guarantee. Sanifirst brand type single hole sink mixer tap with cast directional spout REF: 75721 or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	75721
Previous reference	NC
Brand	Sanifirst
Warranty	10 years against manufacturing defects
Special feature 1	Swivel spout
Special feature 2	Fixed spout
Height to nozzle (mm)	160
Projection (mm)	230
Clip-on spout	No
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Openwork facilitates grip
Connection	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8 with basket filter seals
Minimum pressure	1 bar
Recommended pressure	3 bar with a pressure differential less than 1 bar
Maximum pressure	5 bar
Max tightening	40
Cartridge	75313 Ø 40mm, double flow, temperature limiter, pressure balancing
Coating	Nickel > 10 microns - Chrome > 0.3 microns