



### LABORATORY TAPWARE

#### Candlestick type table top tap with fixed spout - 76027




#### Benefits of the product

Coating: black Rilsan

#### Description

Single candlestick deck-mount tap with smooth fixed spout, for drinking water. Thread connection M G'1/2,  $\varnothing$  10mm removable serrated tip, 150mm projection. Polypropylene brace and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 65mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand single deck-mount candlestick tap with smooth fixed spout REF: 76027 or approved equivalent.

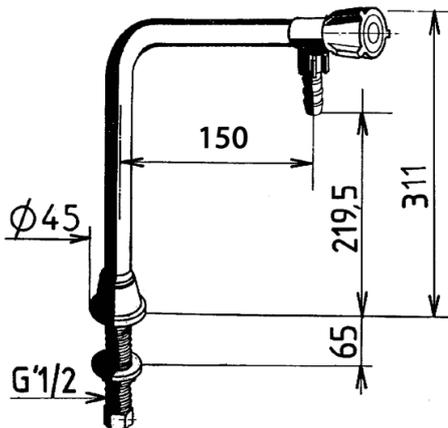



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76027
<b>Previous reference</b>	H9036PT
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defect
<b>Special feature 1</b>	Candlestick
<b>Special feature 2</b>	Tabletop
<b>Special feature 3</b>	Fixed spout
<b>Nozzle 1</b>	Removable connector Ø10 mm
<b>Base color EN</b>	Green
<b>Base washer color EN</b>	Blue
<b>Insert color EN</b>	Blue
<b>Knob color EN</b>	Green
<b>Knob plate color EN</b>	Green
<b>Height to nozzle (mm)</b>	219
<b>Opening mechanism</b>	2.5 turns head
<b>Projection (mm)</b>	150
<b>Connection</b>	Threaded connection M G'1 / 2Threaded connection M G'1 / 2Threaded connection M G'1 / 2Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	65
<b>Packing</b>	1