




LABORATORY TAPWARE

Ø 6 mm outlet for bench - 76093



Description

Polypropylene removable deck-mount nozzle for acidic / basic fluid and deionized / reverse osmosis water. Connection by 1 m length female hose (length can be changed on request). Water tight guided valve head NF, threaded connection M G'1 / 2, Ø 6mm removable serrated tip, comes with Rilsan hose. • Water supply from 0.5 to 1.5 bar 75mm projection. Base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle, polypropylene interior with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand deck-mount nozzle REF: 76093 (formerly H9740PT) or approved equivalent.

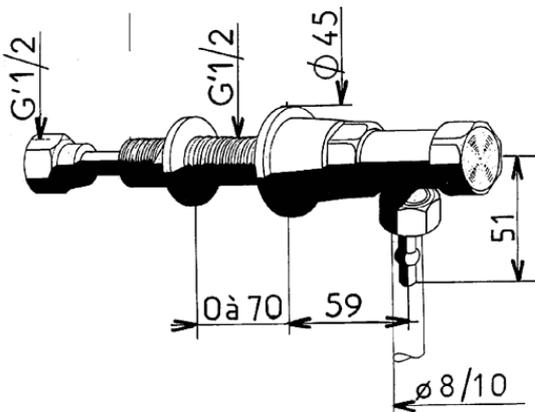



TECHNICAL DATASHEET

Additional Information

Product reference	76093
Previous reference	H9740PT
Brand	FirstLabo
Warranty	5 years against manufacturing defect
Special feature 1	Remotely controlled tapware
Special feature 2	Tabletop
Nozzle 1	Removable connector Ø6 mm
Base color EN	Yellow
Base washer color EN	Yellow
Additional information	With Rilsan tube
Projection (mm)	59
Connection	LN G'1/2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	1 bar
Recommended pressure	1,5 bar
Maximum pressure	3 bar
Blocking temperature	No
Lenght of threaded rod (mm)	102
Max tightening	55
Packing	1