




LABORATORY TAPWARE

Dual taps at 90° for cement bench - 76160



Description

Dual valve tap at 90° for cement bench, for compressed air Guided water proof valve head NF, \varnothing 6mm removable serrated tip, thread connection M G'1 / 2, 120mm projection. Polypropylene brace, base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 100mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand dual tap at 90° for cement bench REF: 76160 (formerly H7626PT) or approved equivalent.

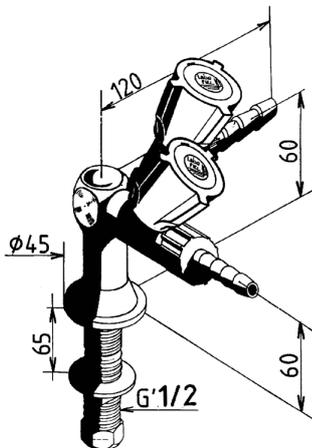



TECHNICAL DATASHEET

Additional Information

Product reference	76160
Previous reference	H7626PT
Brand	FirstLabo
Warranty	5 years against manufacturing defect
Special feature 1	Direct control tapware
Special feature 2	Tabletop
Special feature 3	With two taps
Nozzle 1	Removable connector Ø6 mm
Base color EN	Blue
Base washer color EN	Yellow
Insert color EN	Yellow
Knob color EN	Blue
Knob plate color EN	Blue
Opening mechanism	2.5 turns head
Projection (mm)	120
Connection	Threaded connection M G'1 / 2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	1 bar
Recommended pressure	5 bar
Maximum pressure	7 bar
Blocking temperature	No
Length of threaded rod (mm)	102
Max tightening	100
Packing	1