




LABORATORY TAPWARE

Table top single tap - 76162



Description

Deck-mount tap, for compressed air Guided water proof valve head NF, removable serrated tip \varnothing 6mm, thread connection M G'1 / 2, 102mm projection. Polypropylene brace, base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand connection tap for bench REF: 76162 (formerly H7628PT) or approved equivalent.

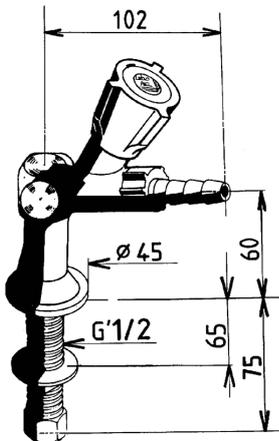



TECHNICAL DATASHEET

Additional Information

Product reference	76162
Previous reference	H7628PT
Brand	FirstLabo
Warranty	5 years against manufacturing defect
Special feature 1	Direct control tapware
Special feature 2	Tabletop
Special feature 3	With one tap
Nozzle 1	Removable connector Ø6 mm
Base color EN	Blue
Base washer color EN	Yellow
Insert color EN	Yellow
Knob color EN	Blue
Knob plate color EN	Blue
Opening mechanism	2.5 turns head
Projection (mm)	102
Connection	Threaded connection M G'1 / 2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	1 bar
Recommended pressure	5 bar
Maximum pressure	7 bar
Blocking temperature	No
Length of threaded rod (mm)	102
Max tightening	55
Packing	1