




### LABORATORY TAPWARE

#### Table top dual taps at 90 ° - 76179



#### Description

Dual deck-mount tap at 90°, for vacuum Guided water proof valve head NF, removable serrated tip  $\varnothing$  6mm, thread connection M G'1 / 2, 120mm projection. Polypropylene brace, base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand dual tap at 90 ° for bench REF: 76179 (formerly H9329PT) or approved equivalent.

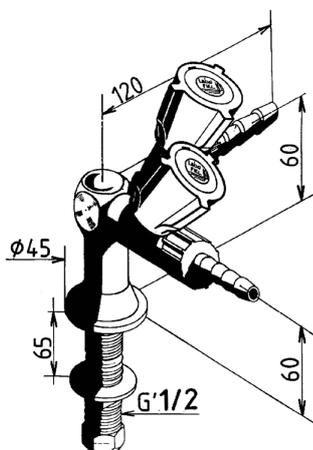



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76179
<b>Previous reference</b>	H9329PT
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defects
<b>Special feature 1</b>	Direct control tapware
<b>Special feature 2</b>	Tabletop
<b>Special feature 3</b>	With two taps
<b>Nozzle 1</b>	Removable connector Ø6 mm
<b>Base color EN</b>	grey
<b>Base washer color EN</b>	gray
<b>Insert color EN</b>	grey
<b>Knob color EN</b>	grey
<b>Knob plate color EN</b>	grey
<b>Opening mechanism</b>	2.5 turns head
<b>Projection (mm)</b>	120
<b>Connection</b>	Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	5 bar
<b>Maximum pressure</b>	7 bar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	55
<b>Packing</b>	1