




LABORATORY TAPWARE

Backrest tap - 76185



Description

Safety tap on backsplash for combustible gases. 1/4 turn ball valve, \varnothing 12mm fixed serrated tip, threaded connection M G'1 / 2, 100mm projection. Polypropylene knob, base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand backsplash safety tap REF: 76185 (formerly H9441PT) or approved equivalent.

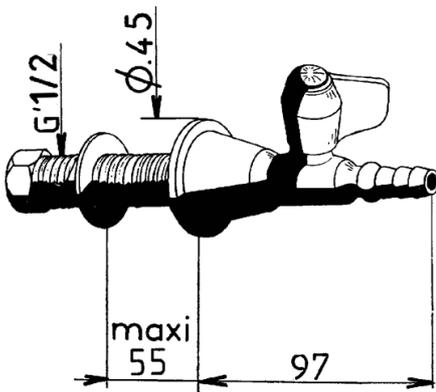



TECHNICAL DATASHEET

Additional Information

Product reference	76185
Previous reference	H9441PT
Brand	FirstLabo
Warranty	5 years against manufacturing defects
Special feature 1	Direct control tapware
Special feature 2	Backsplash
Special feature 3	With one tap
Nozzle 1	fixed connector Ø6 mm
Base color EN	Yellow
Base washer color EN	Yellow
Insert color EN	Yellow
Knob color EN	Yellow
Knob plate color EN	Yellow
Opening mechanism	1/4 turn head of security
Projection (mm)	100
Connection	Threaded connection M G'1 / 2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	27 mbars
Recommended pressure	300 mbar
Maximum pressure	500 mbar
Blocking temperature	No
Length of threaded rod (mm)	102
Max tightening	55
Packing	1