




### LABORATORY TAPWARE

#### Unit mount simple manifold with two safety taps - 76186



#### Description

Bare manifold with two safety taps for wall-mount, for flammable gasses. 1/4 turn ball valve,  $\varnothing$  12mm fixed serrated tip, thread connection M G'1 / 2, 100mm projection. Knobs and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand bare manifold with dual safety tap for wall-mount REF: 76186 (formerly H9445PT) or approved equivalent.

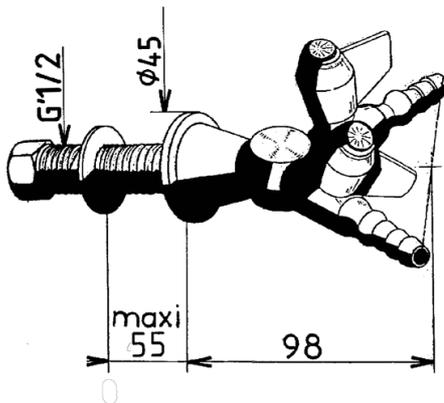



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76186
<b>Previous reference</b>	H9445PT
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defects
<b>Special feature 1</b>	Direct control tapware
<b>Special feature 2</b>	Backsplash
<b>Special feature 3</b>	With two taps
<b>Nozzle 1</b>	fixed connector Ø6 mm
<b>Base color EN</b>	Yellow
<b>Base washer color EN</b>	Yellow
<b>Insert color EN</b>	Yellow
<b>Knob color EN</b>	Yellow
<b>Knob plate color EN</b>	Yellow
<b>Opening mechanism</b>	1/4 turn head of security
<b>Projection (mm)</b>	100
<b>Connection</b>	Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	27 mbars
<b>Recommended pressure</b>	300 mbar
<b>Maximum pressure</b>	500 mbar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	55
<b>Packing</b>	1