




LABORATORY TAPWARE

Ø 6 mm outlet for cement bench - 76189



Description

Nozzle for cement bench, for flammable gasses. Fixed \varnothing 6mm serrated nozzle. Thread connection M G'1/2, projection 60mm. Base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 100mm. Brass nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand nozzle for cement bench REF: 76189 (formerly H9418PT) or approved equivalent.

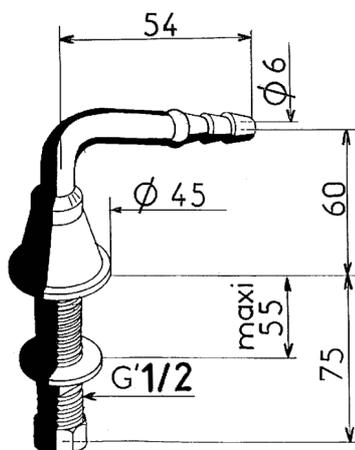



TECHNICAL DATASHEET

Additional Information

Product reference	76189
Previous reference	H9418PT
Brand	FirstLabo
Warranty	5 years against manufacturing defects
Special feature 1	Remotely controlled tapware/ laboratory fume hood
Special feature 2	Tabletop
Nozzle 1	ixed connector Ø6 mm
Base color EN	Yellow
Base washer color EN	Yellow
Projection (mm)	60
Connection	Threaded connection M G'1 / 2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	27 mbars
Recommended pressure	300 mbar
Maximum pressure	500 mbar
Blocking temperature	No
Lenght of threaded rod (mm)	102
Max tightening	100
Packing	1