




### LABORATORY TAPWARE

#### Safety tap socket for cement bench - 76211



#### Description

Single safety tap at 90 ° for cement bench, anti-tamper (inner tube twice as thick), National Education standard, for combustible gases. 1/4 turn ball valve,  $\varnothing$  12mm fixed serrated tip, threaded connection M G'1 / 2, 75mm projection. ABS base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 100mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand anti-tamper single safety tap for cement bench (inner tube twice as thick), National Education standard, REF: 76211 (formerly H9477PT) or approved equivalent.

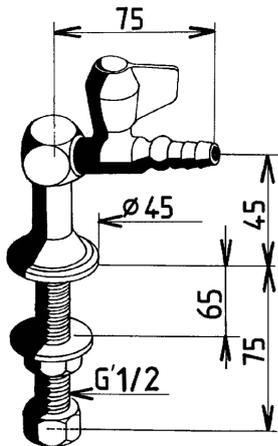



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76211
<b>Previous reference</b>	H9477PT
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defects
<b>Special feature 1</b>	Direct control tapware/ National Education
<b>Special feature 2</b>	Tabletop
<b>Special feature 3</b>	With one tap
<b>Nozzle 1</b>	fixed connector Ø6 mm
<b>Base color EN</b>	
<b>Base washer color EN</b>	Yellow
<b>Insert color EN</b>	Yellow
<b>Knob color EN</b>	Yellow
<b>Knob plate color EN</b>	Yellow
<b>Additional information</b>	Tamper-proof
<b>Opening mechanism</b>	1/4 turn head of security
<b>Projection (mm)</b>	75
<b>Connection</b>	Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	27 mbars
<b>Recommended pressure</b>	300 mbar
<b>Maximum pressure</b>	500 mbar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	100
<b>Packing</b>	1