



LABORATORY TAPWARE

Dual tap at 90 ° Dual tap at 90 ° - 76213




Benefits of the product

Coating: black Rilsan

Description

Dual safety taps at 90 °, deck-mount, anti-tamper (inner tube twice as thick), National Education standard, for combustible gases. 1/4 turn ball valve, \varnothing 12mm fixed serrated tip, thread connection M G'1 / 2, 75mm projection. ABS knobs and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 55mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand tamper-proof dual safety tap at 90 ° REF: 76213 (formerly H9479PT) or approved equivalent.

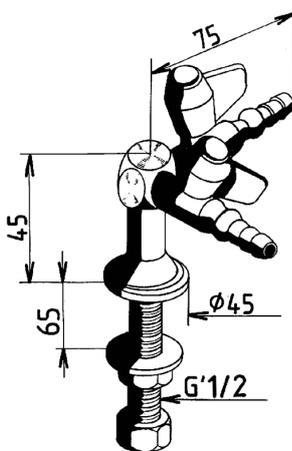



TECHNICAL DATASHEET

Additional Information

Product reference	76213
Previous reference	H9479PT
Brand	FirstLabo
Warranty	5 years against manufacturing defects
Special feature 1	Direct control tapware/ National Education
Special feature 2	Tabletop
Special feature 3	With two taps
Nozzle 1	fixed connector Ø6 mm
Base color EN	Yellow
Base washer color EN	Yellow
Insert color EN	Yellow
Knob color EN	Yellow
Knob plate color EN	Yellow
Additional information	Tamper-proof
Opening mechanism	1/4 turn head of security
Projection (mm)	75
Connection	Threaded connection M G'1 / 2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	27 mbars
Recommended pressure	300 mbar
Maximum pressure	500 mbar
Blocking temperature	No
Lenght of threaded rod (mm)	102
Max tightening	55
Packing	1