



### LABORATORY TAPWARE

#### Goose-neck with directional spout knob on the left - 76230




#### Benefits of the product

Coating: black Rilsan

#### Description

Goose-neck tapware with smooth directional removable spout, knob on the left on splashboard, for potable water. NF valve head guided out of water, threaded M G'1/2 stem connection,  $\varnothing$  10mm removable grooved tip, projection 200mm. Polypropylene cross, base and base washer using the NF EN 13792 European standard colour codes. Maximum tightening 55mm. Brass body and tips with black Nylolac coating (stronger than a basic epoxy finish). Possibility of a knob on the left. Single patented fixture kit, our grooved stems are designed to be fitted with a steel claw washer that prevents the tapware from any rotation. 5 year guarantee. First Labo brand type goose-neck with smooth directional removable spout, knob on the left on splashboard REF. 76230 or approved equivalent.

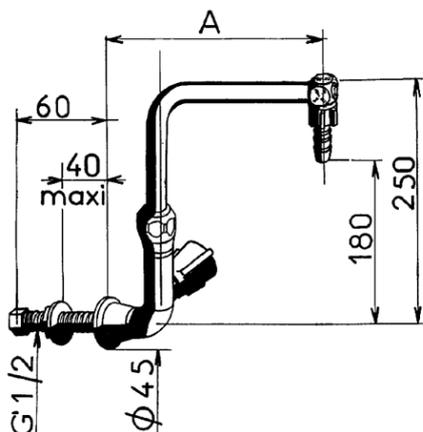



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	76230
<b>Previous reference</b>	NC
<b>Brand</b>	FirstLabo
<b>Warranty</b>	5 years against manufacturing defect
<b>Special feature 1</b>	Direct control tapware
<b>Special feature 2</b>	Backsplash
<b>Special feature 3</b>	Swivel spout
<b>Nozzle 1</b>	Removable connector Ø10 mm
<b>Base color EN</b>	Green
<b>Base washer color EN</b>	Blue
<b>Insert color EN</b>	Blue
<b>Knob color EN</b>	Green
<b>Knob plate color EN</b>	Green
<b>Additional information</b>	LHS knobs possible.
<b>Height to nozzle (mm)</b>	180
<b>Length of spout (mm)</b>	150
<b>Opening mechanism</b>	2.5 turns head
<b>Projection (mm)</b>	200
<b>Connection</b>	Threaded connection M G'1 / 2Threaded connection M G'1 / 2Threaded connection M G'1 / 2Threaded connection M G'1 / 2
<b>Adjustable flow rate</b>	No
<b>Dual flow rate</b>	No
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Blocking temperature</b>	No
<b>Length of threaded rod (mm)</b>	102
<b>Max tightening</b>	55
<b>Packing</b>	1