
TECHNICAL DATA SHEET



Range: IN-DUCT CONTROLS FOR FLUSH VALVES

Ref: 14261SB - Ready-to-install Kit for PRESTO 1000XL Flush Valve - Suitable for rimless toilets bowls



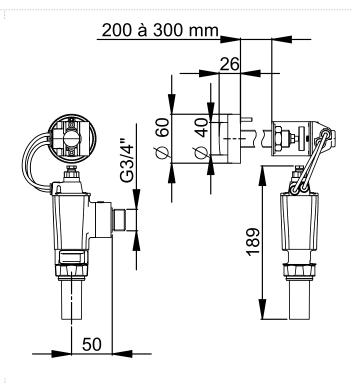

> Working pressure:

1 to 5 bar

> Volume of water delivered:

- Adjustable from 6 to 9l
- Anti-water-hammering device60l/min flow regulator

> Flow time:

• From 6 to 9 seconds

> Hydraulic supply:

- Equerre M G 3/4" (20x27)
 Outlet connection on flush pipe Ø 28 mm

> Material and colour finish:

- Bright brass body and stop valve
 Push button in brass, chrome finish

> Security:

- Suitable for rimless toilets bowls of the market
 Anti-flowback device provides protection of drinking water networks against any suck-back from foul water
 Patented anti-blocking "S" system to avoid having continuous water flow even the push button is blocked in open position

> Delivered with:

- 1 in-duct PRESTO 1000XL flushvalve with incorporated stop valve
 1 in-duct control for partition thickness from 200 to 300 mm with screw
 1 elbow PVC tube
 1 junction nozzle
 Instruction manual

> Standards & approvals:

- Acoustic class II

- Acoustic class II
 Brass body in accordance with EN 1982, EN 12164, EN 12165
 Molded chrome-plated body in accordance with EN 12540
 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227













