


**Range :** IN-DUCT CONTROLS FOR FLUSH VALVES

**Ref :** 14261 - COMPLETE READY-TO-INSTALL KIT FOR PRESTO 1000XL FLUSH VALVE

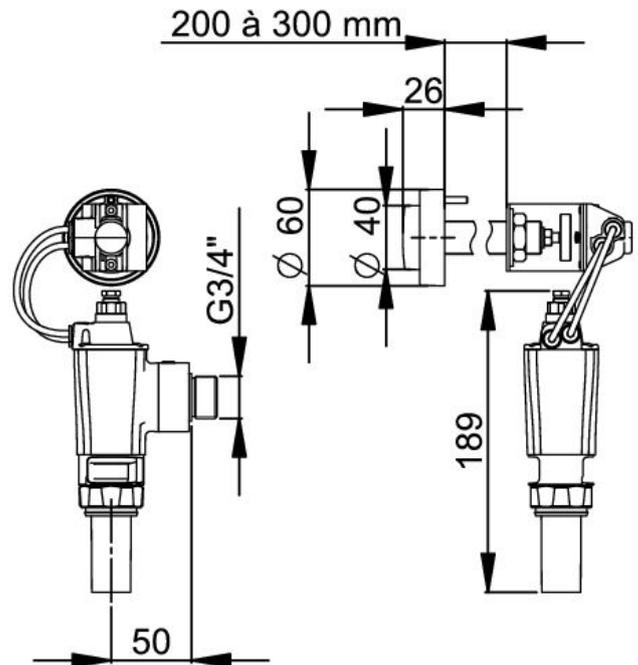

**> Working pressure :**

- 1 to 5 bar

**> Volume of water delivered :**

- Adjustable from 6 to 9 l
- Anti-water-hammering device
- Automatic flow regulation at 1 l/s constantly from 1.2 to 4 bar dynamic working pressure

**> Flow time :**

- From 6 to 9 seconds

**> Hydraulic supply :**

- Equerre M G 3/4" (20x27)
- Outlet connection on flush pipe Ø 28 mm

**> Material and colour finish :**

- Bright brass body and stop valve
- Push button in brass, chrome finish

**> Security :**

- Anti-flowback device provides protection of drinking water networks against any suck-back from foul water
- Patented anti-blocking "S" system to avoid having continuous water flow even the push button is blocked in open position

**> Delivered with :**

- 1 in-duct PRESTO 1000XL flushvalve with incorporated stop valve
- 1 in-duct control for partition thickness from 200 to 300 mm with screw
- 1 elbow PVC tube
- 1 junction nozzle
- Instruction manual

**> Standards & approvals :**

- Acoustic class II
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

