


Range: Neo Duo

Ref: 64718 - NEO DUO deck-mounted single tap 3l/min 7/11sec with blue lever

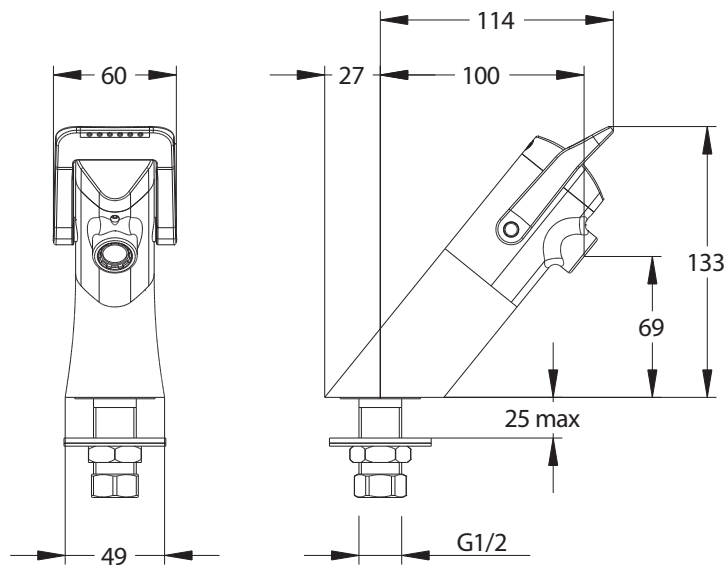

Recommended operating pressure:

- 1 to 5 bar

Operation:

- Smooth, intuitive triggering by lever action on ergonomic lever up and down
- Suitable for PRM, children or the elderly

Flow rate:

- 3l/min at 3 bar with integrated anti-tartar regulated aerator - 4-position adjustment
- Anti-waterhammer device

Flow duration:

- Short time delay: 7 seconds (± 3 seconds) - lever up (wetting)
- Long time delay: 11 seconds (± 3 seconds) - lever down (rinsing)
- Timers modifiable on the 2 positions with 7, 11 or 15 sec (± 5 seconds)

Hydraulic supply:

- M G 1/2" x 40mm
- For cold or pre-mitigated water

Material(s) and finish(s):

- Brass body and cover | Chrome finish
- Ergonomic handle in technical polymer | Turquoise blue finish (RAL 5018)

Thermal resistance:

- This faucet resists a temperature of 75°C for 30 minutes in thermal shock conditions

Delivered with :

- 1 Filter gasket
- 1 Base gasket
- 1 Fixing nut + 1 stainless steel washer
- 1 Nut for copper tube 12 x 14 1 Rubber flat gasket
- 1 Self-adhesive color marker

Standards / Approvals :

- Chrome-plated brass body conforming to NF EN1982 / NF EN12164 / NF EN12165
- Nickel-Chromium surface treatment to NF EN12540
- Neutral salt spray resistance (NSS): 200 h to NF ISO 9227