



### HEALTHCARE TAPWARE

### TOUCH MASTERMIX thermostatic shower tablet - Downward outlet - 75732




#### Benefits of the product

##### MASTERMIX RANGE

- Ingenious combination of two solenoid valves and thermostatic cartridge: safety and reliability.
- No cross-connection between hot water and cold water.
- Without check-valves
- A simple light touch on the button will activate or stop the water flow.
- Suitable for mobility-impaired and children. Autoflush adjustable by the technical staff.
- Cold body: anti-scalding insulation
- Body with smooth interior: limits the risk of bacterial proliferation
- Dual safety temperature limiter (38°C and 41°C)
- Temperature stability and anti-scalding safety
- Quick and easy Installation and maintenance.
- Safe thermal shock: only accessible by technical staff
- Shower tablet: easy cleaning, no corners, nooks
- "Shelf/tablet" function
- Excentric connectors
- Body docking with the wall: optimized cleaning of all contact surfaces

#### Description

Shower thermostatic tablet without mixing chamber under pressure (avoiding DHW and DCW intercommunication upstream of the shutter), with MASTERMIX conception, equipped with ergonomic swivel knob, in chrome-plated zamak, and with TOUCH soft activation button. Temperature knob with dual temperature limiter 38°C and 41°C. Safety temperature unlocking for thermal shock, and accessible only by technical staff, without dismantling the knob. Connection exclusively by means of a fixing plate with connection 3/4" span 150mm. M G 1/2" downward outlet with integrated non-return valve. Opening/closing button with TOUCH technology with default duty flush (30 sec every 24h without use). Fixed flow rate around 8L/min, temperature adjustable from 18° to 41°C. Unique and patented antiintercommunication hot water (HW) and cold water (CW) system: removal of check valves on the HW and CW mixer inlets. Combination of a compliant French Norm EN1111 thermostatic cartridge and two solenoid valves. 3-year warranty for thermostatic cartridge and electronic components and 10-year warranty for the tap. REF: 75732, MASTERMIX technology, brand SANIFIRST or equivalent approved.

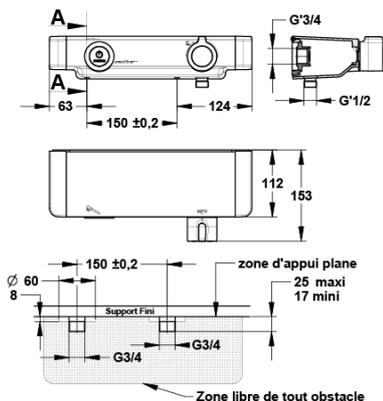



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75732
<b>Previous reference</b>	NC
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defect / 3 years for the thermostatic cartridge and electronic components
<b>Power supply</b>	Battery powered
<b>Special feature 2</b>	Shower
<b>Special feature 3</b>	Thermostatic mixer
<b>Special feature 4</b>	Wall-mounted
<b>Clip-on spout</b>	No
<b>Lever</b>	Chrome-plated zamak knobs
<b>Connection</b>	150 mm span
<b>Flow rate</b>	Fixed approximately 8L/min
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar
<b>Maximum pressure</b>	5 bar
<b>Cartridge</b>	Thermostatic cartridge compliant to French Norm EN 1111
<b>Thermal shock</b>	Yes