



## TECHNICAL DATASHEET

### HEALTHCARE TAPWARE

#### Thermostatic shower mixer, upward handle and downward output - Mastermix - 75309



##### Benefits of the product

- Fast and secure installation of covers
  - No effort or risk of falling while fitting
  - 4 types of compatible covers
  - Maintenance and transportation included
  - for the entire lease period.
- 
- Dimensions of the machine:
  - Height: 90cm - Width: 33cm - Width: 82cm

##### Description



Thermostatic shower mixer MASTERMIX design equipped with ergonomic upward flow control handle.

Temperature knob with stop at 38°, releasable to 45°C

150mm span, off centre M 1/2 fittings with chrome cover plates and filter seals. Shower output M'1 / 2 downward with integrated back-flow valve. Flow adjustable between 5 and 14l/min

Unique patented system avoiding communication between hot and cold water supplies eliminating back-flow valves on mixer supplies using a ceramic cartridge and a thermostatic cartridge NF EN 111.

3-year warranty for the thermostatic cartridge and 10-year warranty for the rest of the fittings. PART NO.: 75309, MASTERMIX design, Sanifirst brand or approved equivalent.

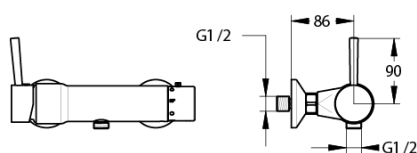



## TECHNICAL DATASHEET

### Additional Information

Product reference	75309
Previous reference	SF3932AA
Brand	Sanifirst
Warranty	10 years against manufacturing defects / 3 years for the thermostatic cartridge
Special feature 1	Shower
Clip-on spout	No
Lever	Upward opening / closing handle and T ° C brass knob
Connection	LN G'3 / 4 comes with rosettes and off-centre fittings M G'1 / 2 - M G'3 / 4
Flow rate	Estimate: adjustable between 5 and 14l/min
Minimum pressure	1 bar
Recommended pressure	3 bar - avoid pressure differences of more than 1 bar between the hot and cold water supplies
Maximum pressure	5 bar
Cartridge	One thermostat and one ceramic
Coating	Nickel > 10 microns - Chrome > 0.3 microns
Thermal shock	No