
TECHNICAL DATA SHEET



Range: PRESTO CHEF - Professionnal Kitchen range

Ref: 70808 - Deck-mounted mixer tap with 2 holes – upward spout



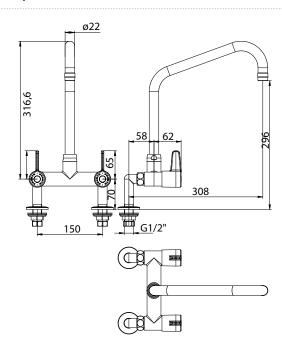

> THE PRODUCT BENEFITS

- · Resistant to intensive use
- Neinforced body / spout interface with double sliding bearings: no play and high endurance
 Robust spout: diameter 22 mm
 Intuitive and ergonomic knobs: easy grip
 Hygiene: spout with smooth interior

- Product design Ease of cleaning
- Easy maintenance: presence of a slot under the red / blue patch allowing the passage of a screwdriver
 Ease of maintenance: availability of all spare parts
 Flow straightener to channel water and avoid lateral water splashes

> TECHNICAL SPECIFICATIONS > Model:

- · Two-hole deck mixer with spout above
- $360\,^\circ$ swivel spout, projection $308\,$ mm, height under spout $296\,$ mm, diameter $22\,$ mm. Spout thickness: $1.5\,$ mm. $1/4\,$ turn ceramic head
- · Interchangeable anti-tartar flow straightener

> Recommended working pressure:

• 1 to 5 bars

> Flow rate:

• 81L / min at 3 bar

> Hydraulic supply:

• G 1/2 " (15x 21)

> Material and color of finish:

- Chromed brass body and spoutMaterial compliant with the "UBA" list

> Thermal resistance :

• Withstands a temperature of 75 ° C for 30 minutes (in the context of thermal shock).

> Delivered with:

- Columns with nut2 filters

> Standards and approvals:

- Chromed brass body compliant with standards NF EN1982 / NF EN 12164 / NF EN 12165
 Nickel-Chrome surface treatment according to NF EN12540
 Resistance to neutral salt spray (NSS): 200 h according to NF ISO 9227











