


Range: Santé Standard

Ref: 75549 - SHOWER MIXER KIT WITH OPENWORK HANDLE

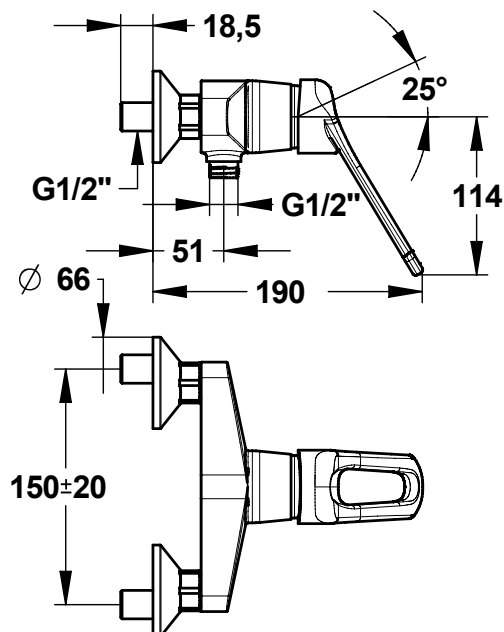

Benefits of the product

- Ergonomic lever: suitable for patients and staff
- Multifunction ceramic cartridge Ø 40: dual flow rates, flow restrictor, and temperature lock
- Water savings, safe operation, and controlled water consumption.

Model

- Shower mixer, downward outlet, wall mounted
- Openwork lever
- Span 150 mm (+/-) 10 mm
- Ceramic cartridge Ø 40 : dual flow rates, flow restrictor, and temperature lock

Recommended pressure

- 3 bar - avoid pressure differences greater than 1 bar between DHW and DCW.
- Minimum pressure: 1 bar.
- Maximum pressure: 5 bar.

Material

- Body and handle in polished chrome-plated brass.

Connection

- Shower outlet M G'1 / 2 with integrated back-flow valve.
- Connection LN G'3 / 4 comes with rosette cover plates and off-centre fittings M G'1 / 2

Warranty

- 10 years against any manufacturing defect.
- 3 years for the thermostatic cartridge.

Delivred with:

- Shower mixer with openwork lever (item no. 75600)
- Chrome-plated 2-jet showerhead with anti-scale nozzles (item no. 75280)
- Smooth gray synthetic hose, 1500 mm long (item no. 75415)
- Chrome-plated shower rod, Ø 25 mm, 600 mm long, with soap dish (item no. 75288)