




LABORATORY TAPWARE

Manifold on base with two taps at 90 ° - 76153

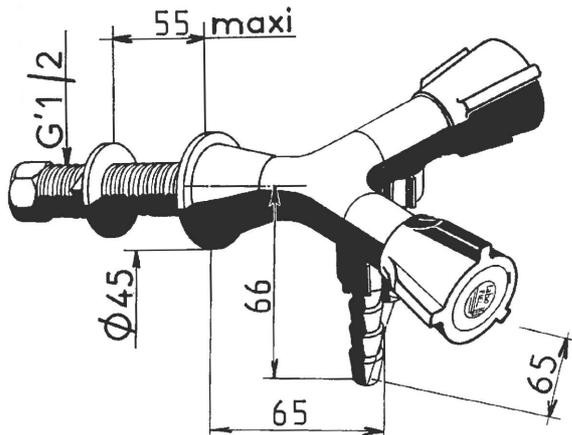

Description

Dual tap manifold at 90°, on base, for compressed air Guided water proof valve head NF, ø 6mm fixed serrated tip, thread connection M G'1 / 2, 120mm projection. Polypropylene brace, base and flanged washer according to colour codes of the European standard NF EN 13792. Maximum tightening 40mm. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). Unique and patented reinforced mounting kit, the serrated tips are designed for a steel claw washer thereby preventing rotation of the tapware. 5 year warranty. First Labo brand dual tap manifold at 90 ° on base REF: 76153 (formerly H7646PT) or approved equivalent.



TECHNICAL DATASHEET

Additional Information

Product reference	76153
Previous reference	H7646PT
Brand	FirstLabo
Warranty	5 years against manufacturing defect
Special feature 1	Direct control tapware
Special feature 2	Backsplash
Special feature 3	With two taps
Nozzle 1	Removable connector Ø6 mm
Base color EN	Blue
Base washer color EN	Yellow
Insert color EN	Yellow
Insert color 2 EN	Yellow
Knob color EN	Blue
Knob plate color EN	Blue
Opening mechanism	2.5 turns head
Projection (mm)	120
Connection	Threaded connection M G'3 / 8
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	1 bar
Recommended pressure	5 bar
Maximum pressure	7 bar
Blocking temperature	No
Lenght of threaded rod (mm)	102
Max tightening	40
Packing	1