




LABORATORY TAPWARE

Safety tap, full flow, to mount on bracket - 76184



Description

Safety tap, full flow, wall-mount for flammable gasses. 1/4 turn ball valve, \varnothing 6mm fixed serrated tip, threaded connection M G'1 / 2, 65mm projection. Polypropylene knob according to colour codes of the European standard NF EN 13792. Brass body and nozzle with black Nylolac coating (stronger than simple Epoxy finish). 5 year warranty. First Labo brand full flow tap REF: 76184 (formerly H9412PT) or approved equivalent.

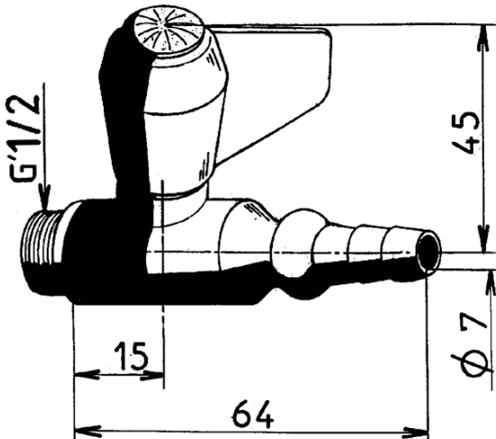



TECHNICAL DATASHEET

Additional Information

Product reference	76184
Previous reference	H9412PT
Brand	FirstLabo
Warranty	5 years against manufacturing defects
Special feature 1	Direct control tapware
Special feature 2	Wall-mounted
Special feature 3	With one tap
Nozzle 1	fixed connector Ø6 mm
Base color EN	Yellow
Base washer color EN	Yellow
Insert color EN	Yellow
Knob color EN	Yellow
Knob plate color EN	Yellow
Opening mechanism	1/4 turn head of security
Projection (mm)	65
Connection	M G'1/2
Adjustable flow rate	No
Dual flow rate	No
Minimum pressure	27 mbars
Recommended pressure	300 mbar
Maximum pressure	500 mbar
Blocking temperature	No
Packing	1